


WWW.AMOREDESIGNFACTORY.COM

TEL: 855-72-AMORE

(26673)

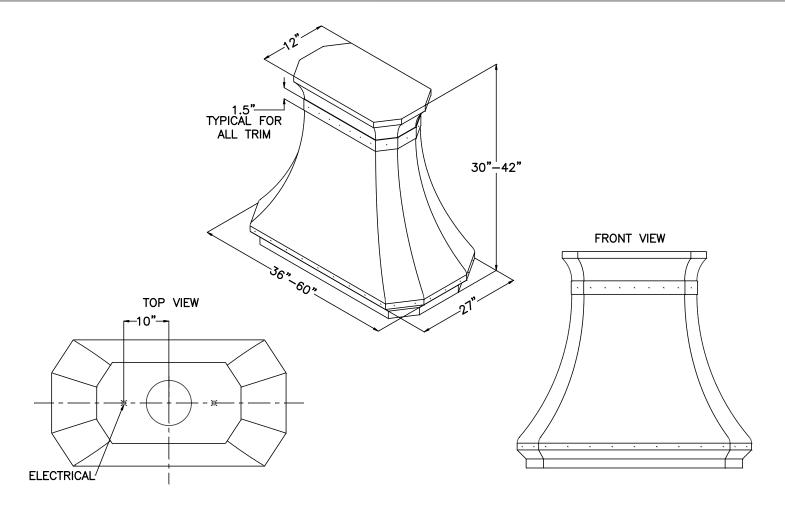

CUSTOM SIZES AND CONFIGURATIONS AVAILABLE UPON REQUEST

FAN SPECIFICATIONS *OPTIONAL*


1 FAN = 600 CFM = 6" DUCT 2 FANS = 1200 CFM =10" DUCT

2 FAINS = 1200 CFINI - 10 DOC1		
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	60
T (11 15 W		
Type of data definition		ml
Valid for approval / standard		CE
Speed	min-1	2000
Power input	W	430
Current draw	Α	3.75
Motor capacitor	μF	25
Capacitor voltage	VDB	240
Capacitor standard		P2 (CE)
Min. back pressure	Pa	100
Max. ambient temperature	°C	40

HALOGEN BULB SPECIFICATIONS *LED LIGHTING AVAILABLE UPON REQUEST*

PACKING INFO	120V 50W GX5.3	
NOMINAL VOLTAGE (V)	120	
NOMINAL WATTAGE(W) +/- 10%	49.5	
BASE	GX5.3	
DIAMETER (IN)	1.96	
OVERALL LENGTH (IN)	1.89	

RECOMMENDED MOUNTING HEIGHT FOR OPTIMAL PERFORMANCE



ARTISAN CEILING MOUNT INCLUDED WITH: